


# NTAS 13

## PO Mooring # 1266

Position: 14° xxxx' N, xxxx' W  
WATCH CIRCLE = 4.0 N.Miles

Modular Foam Buoy with (2) ASIMET Systems:  
ARGOS AND IRIIDIUM TELEMETRY, STAND ALONE XEOS GPS  
LASCAR AT/H - VIASALA WXT520 - SBE 39 AT  
NDBC WAMDAS

ASIMET INFO		
MODULE	SYS 1	SYS 2
HRH		
BPR		
WIND		
PRECIP		
LWR		
SWR		

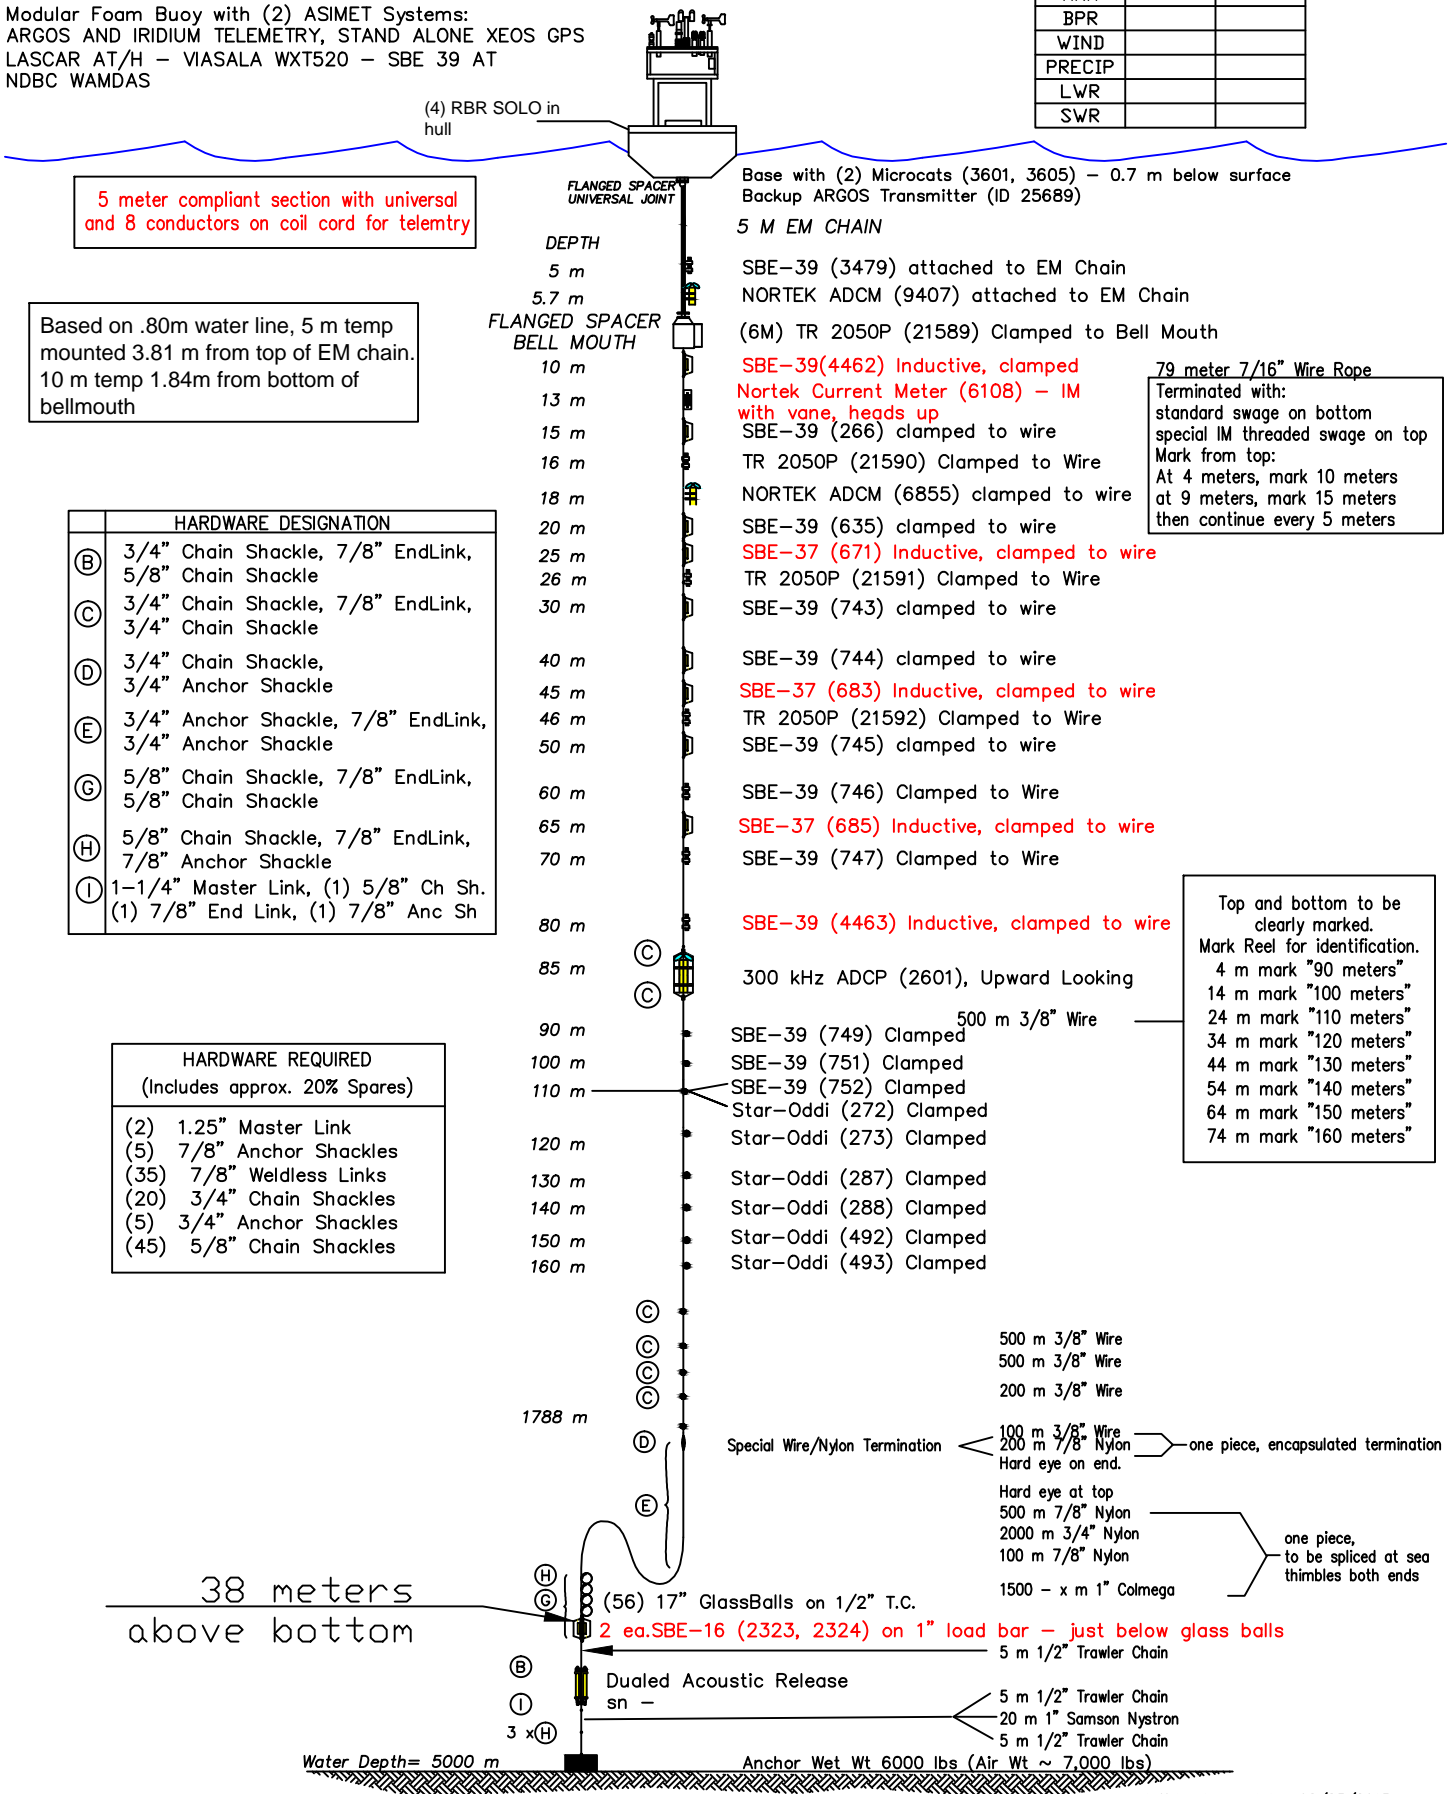

5 meter compliant section with universal and 8 conductors on coil cord for telemetry

Based on .80m water line, 5 m temp mounted 3.81 m from top of EM chain. 10 m temp 1.84m from bottom of bellmouth

HARDWARE DESIGNATION	
(B)	3/4" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	3/4" Chain Shackle, 3/4" Anchor Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	1-1/4" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED	
(Includes approx. 20% Spares)	
(2)	1.25" Master Link
(5)	7/8" Anchor Shackles
(35)	7/8" Weldless Links
(20)	3/4" Chain Shackles
(5)	3/4" Anchor Shackles
(45)	5/8" Chain Shackles

79 meter 7/16" Wire Rope  
Terminated with: standard swage on bottom special IM threaded swage on top  
Mark from top:  
At 4 meters, mark 10 meters at 9 meters, mark 15 meters then continue every 5 meters

Top and bottom to be clearly marked.  
Mark Reel for identification.  
4 m mark "90 meters"  
14 m mark "100 meters"  
24 m mark "110 meters"  
34 m mark "120 meters"  
44 m mark "130 meters"  
54 m mark "140 meters"  
64 m mark "150 meters"  
74 m mark "160 meters"