


PO Mooring Number 1247

MAX. DIA. BUOY WATCH CIRCLE = 3.7 N.Miles

2.7 m Surlyn Foam MOBS Buoy with:
 (2) IMET/ARGOS Telemetry,
 1 - Sonic Wind 1 - RM Young Wind
 1- Stand Alone Wind - 1 SA HRH -1 Lascar HRH
 1- SA SBE 39 AT - PMEL PCO2 System

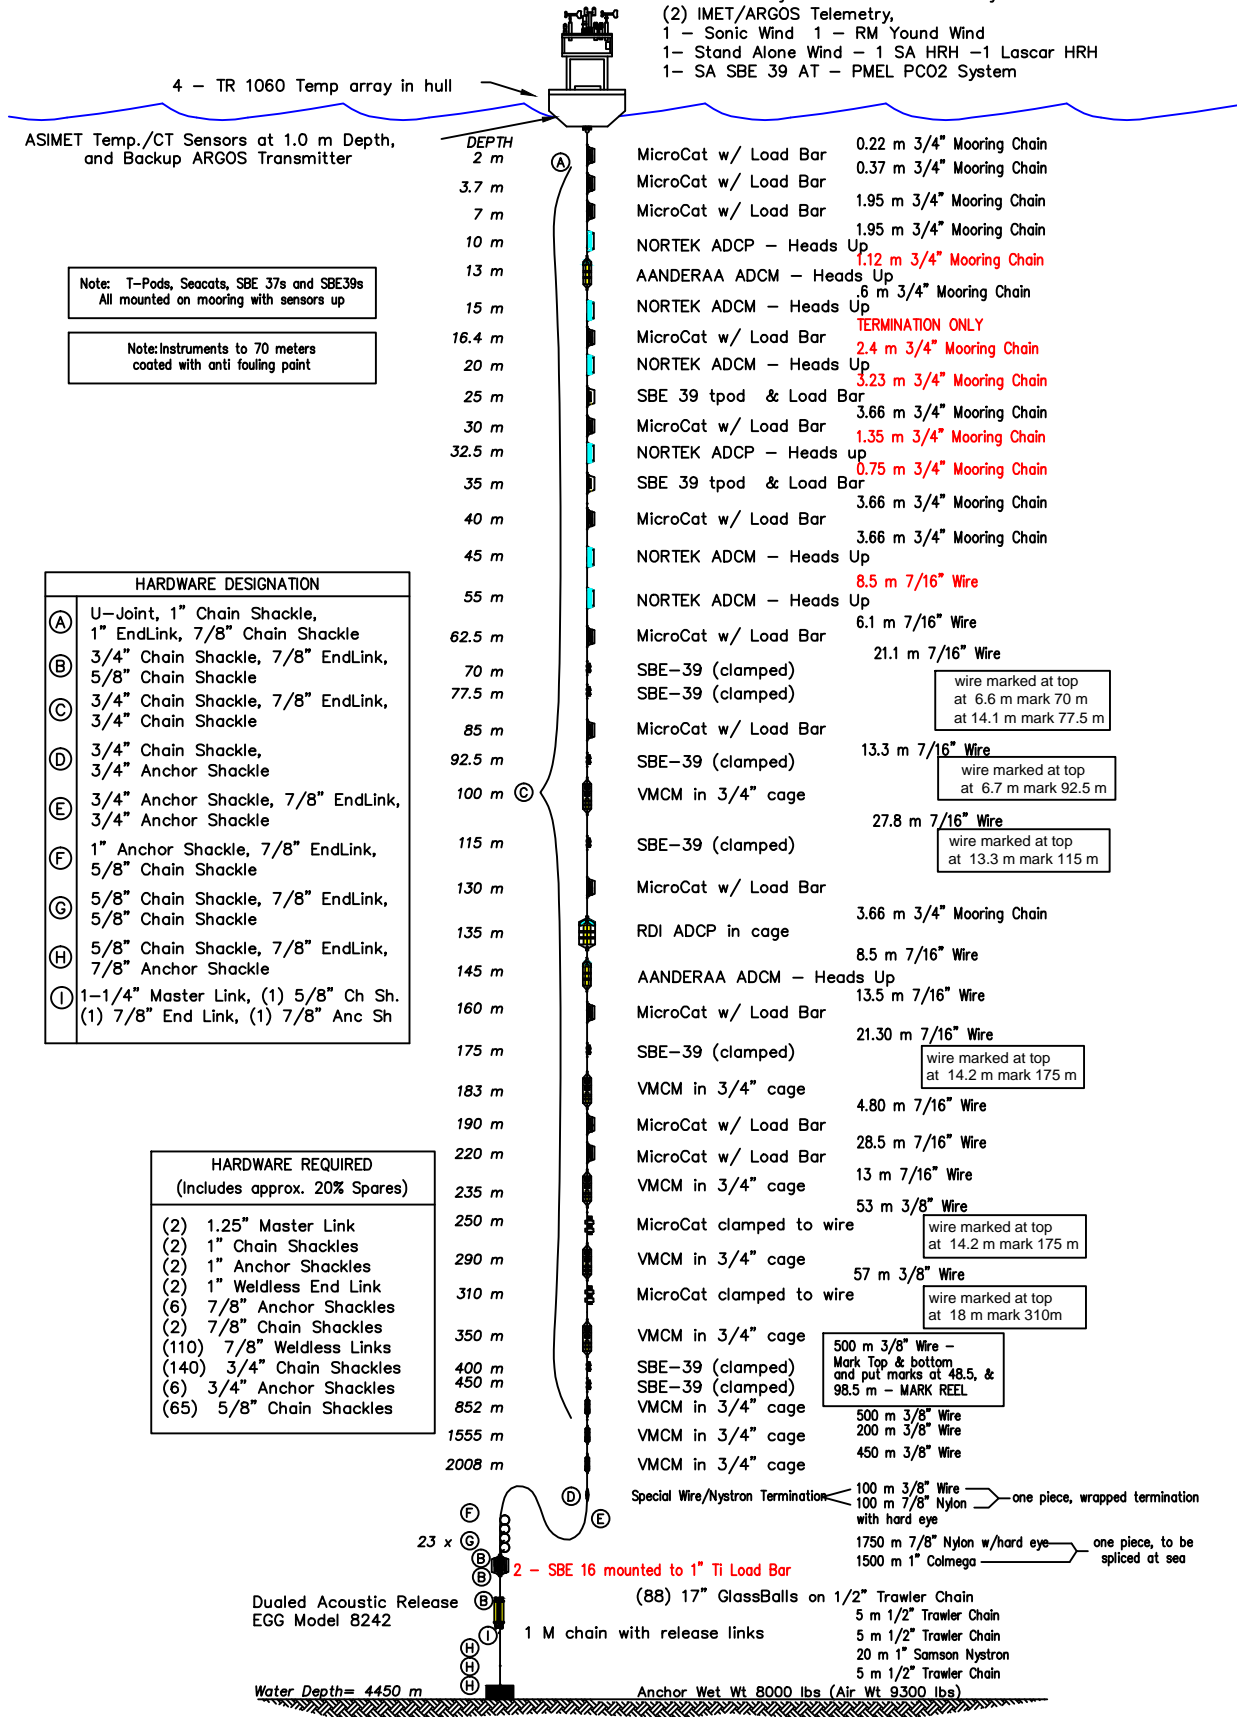

Note: T-Pods, Seacats, SBE 37s and SBE39s
 All mounted on mooring with sensors up

Note: Instruments to 70 meters
 coated with anti fouling paint

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackles, 1" EndLink, 7/8" Chain Shackles
(B)	3/4" Chain Shackles, 7/8" EndLink, 5/8" Chain Shackles
(C)	3/4" Chain Shackles, 7/8" EndLink, 3/4" Chain Shackles
(D)	3/4" Chain Shackles, 3/4" Anchor Shackles
(E)	3/4" Anchor Shackles, 7/8" EndLink, 3/4" Anchor Shackles
(F)	1" Anchor Shackles, 7/8" EndLink, 5/8" Chain Shackles
(G)	5/8" Chain Shackles, 7/8" EndLink, 5/8" Chain Shackles
(H)	5/8" Chain Shackles, 7/8" EndLink, 7/8" Anchor Shackles
(I)	1-1/4" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED (Includes approx. 20% Spares)	
(2)	1.25" Master Link
(2)	1" Chain Shackles
(2)	1" Anchor Shackles
(2)	1" Weldless End Link
(6)	7/8" Anchor Shackles
(2)	7/8" Chain Shackles
(110)	7/8" Weldless Links
(140)	3/4" Chain Shackles
(6)	3/4" Anchor Shackles
(65)	5/8" Chain Shackles

500 m 3/8" Wire -
 Mark Top & bottom
 and put marks at 48.5, &
 98.5 m - MARK REEL

500 m 3/8" Wire
 200 m 3/8" Wire
 450 m 3/8" Wire

100 m 3/8" Wire - one piece, wrapped termination with hard eye

1750 m 7/8" Nylon w/hard eye - one piece, to be spliced at sea