

MAX. DIA. BUOY WATCH CIRCLE = 4.4 N.Miles

Position: 22 46.0 N 157 54 W

PO # 1209  
July 13, 2009

2.7 m Surlyn Buoy with  
(2) IMET/ARGOS Telemetry,  
XEOS GPS


Bridle with IMET Temp. Sensors at 1.0 m Depth,  
and Backup ARGOS Transmitter

FLOATING SST  
PLUS FIXED DEPTH SST

Note: All instruments without cages  
have protected trawler guards

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackle, 1" EndLink, 3/4" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	3/4" Chain Shackle, 3/4" Anchor Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(F)	1" Anchor Shackle, 7/8" EndLink, 5/8" Chain Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	(1) 1.25" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED (Includes approx. 20% Spares)	
(2)	1" Chain Shackles
(2)	1" Anchor Shackles
(2)	1" Weldless End Link
(2)	1.25" Master Link
(4)	7/8" Anchor Shackles
(2)	7/8" Chain Shackles
(85)	7/8" Weldless Links
(100)	3/4" Chain Shackles
(10)	3/4" Anchor Shackles
(65)	5/8" Chain Shackles

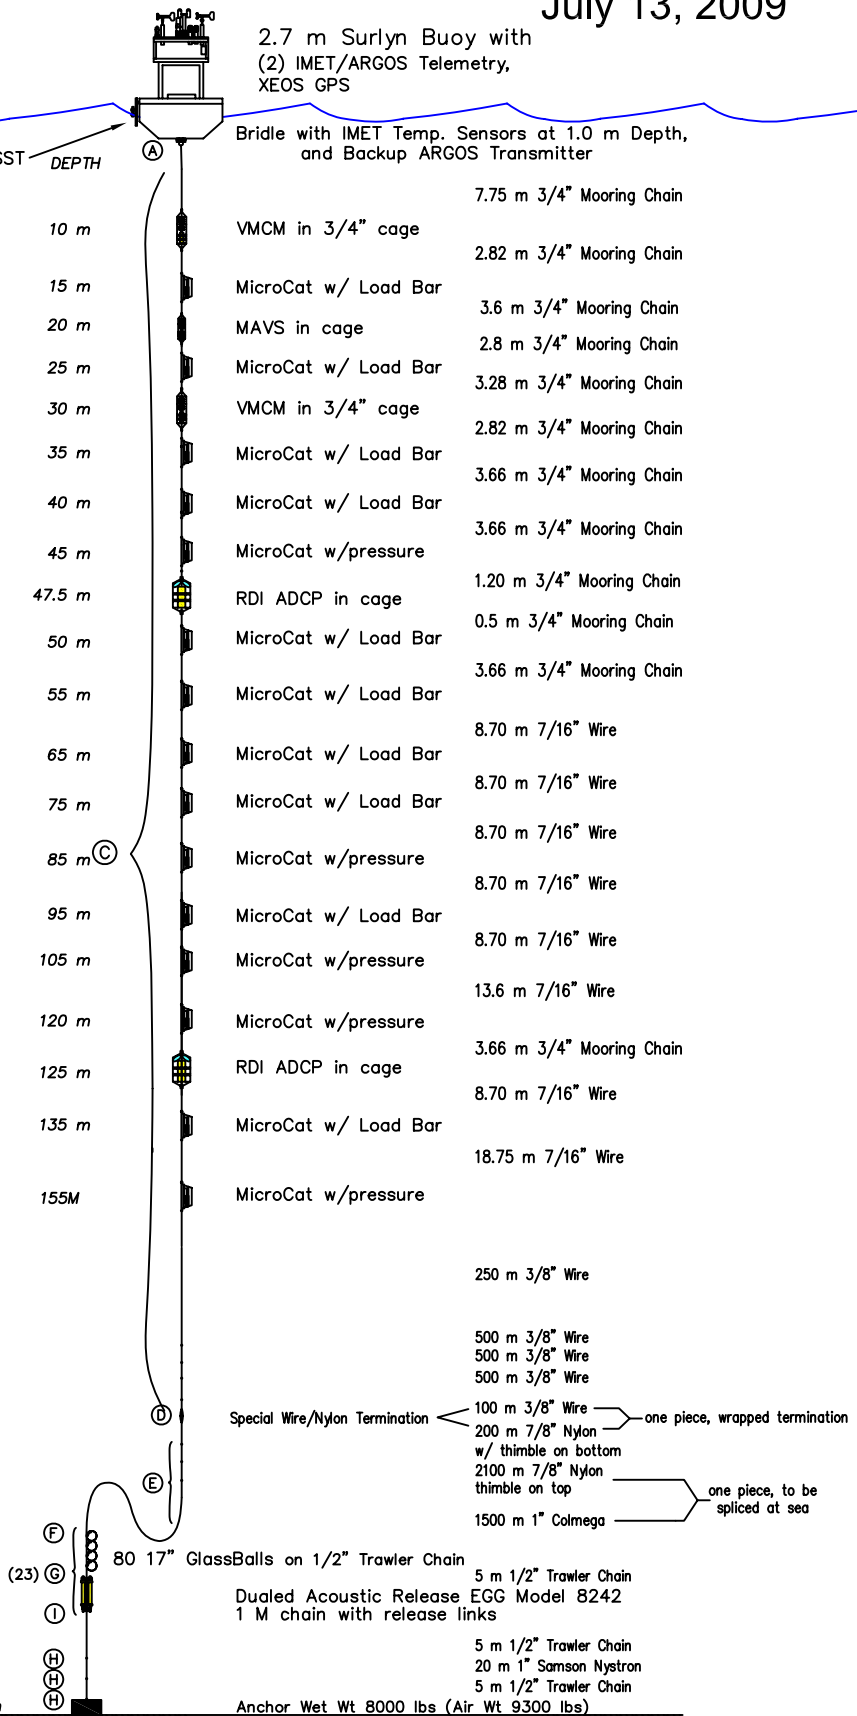

# WHOTS MOORING

6th Deployment  
V5 - As deployed

Jord