

MAX. DIA. BUOY WATCH CIRCLE = 4.4 N.Miles

Position: 22 46 N, 157 54 W


2.7 m Surlyn Buoy with
(2) IMET/ARGOS Telemetry,
XEOS GPS
Lascar At/H
VIASALA WXT 520

4 TR 1060 Fixed In Hull
Replace Floating SST

Bridle with IMET Temp. Sensors at 1.0 m Depth,
and Backup ARGOS Transmitter

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackles, 1" EndLink, 3/4" Chain Shackles
(C)	3/4" Chain Shackles, 7/8" EndLink, 3/4" Chain Shackles
(D)	3/4" Chain Shackles, 3/4" Anchor Shackles
(E)	3/4" Anchor Shackles, 7/8" EndLink, 3/4" Anchor Shackles
(F)	1" Anchor Shackles, 7/8" EndLink, 5/8" Chain Shackles
(G)	5/8" Chain Shackles, 7/8" EndLink, 5/8" Chain Shackles
(H)	5/8" Chain Shackles, 7/8" EndLink, 7/8" Anchor Shackles
(I)	(1) 1.25" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh

HARDWARE REQUIRED (Includes approx. 20% Spares)	
(2)	1" Chain Shackles
(2)	1" Anchor Shackles
(2)	1" Weldless End Link
(2)	1.25" Master Link
(4)	7/8" Anchor Shackles
(2)	7/8" Chain Shackles
(85)	7/8" Weldless Links
(100)	3/4" Chain Shackles
(10)	3/4" Anchor Shackles
(65)	5/8" Chain Shackles

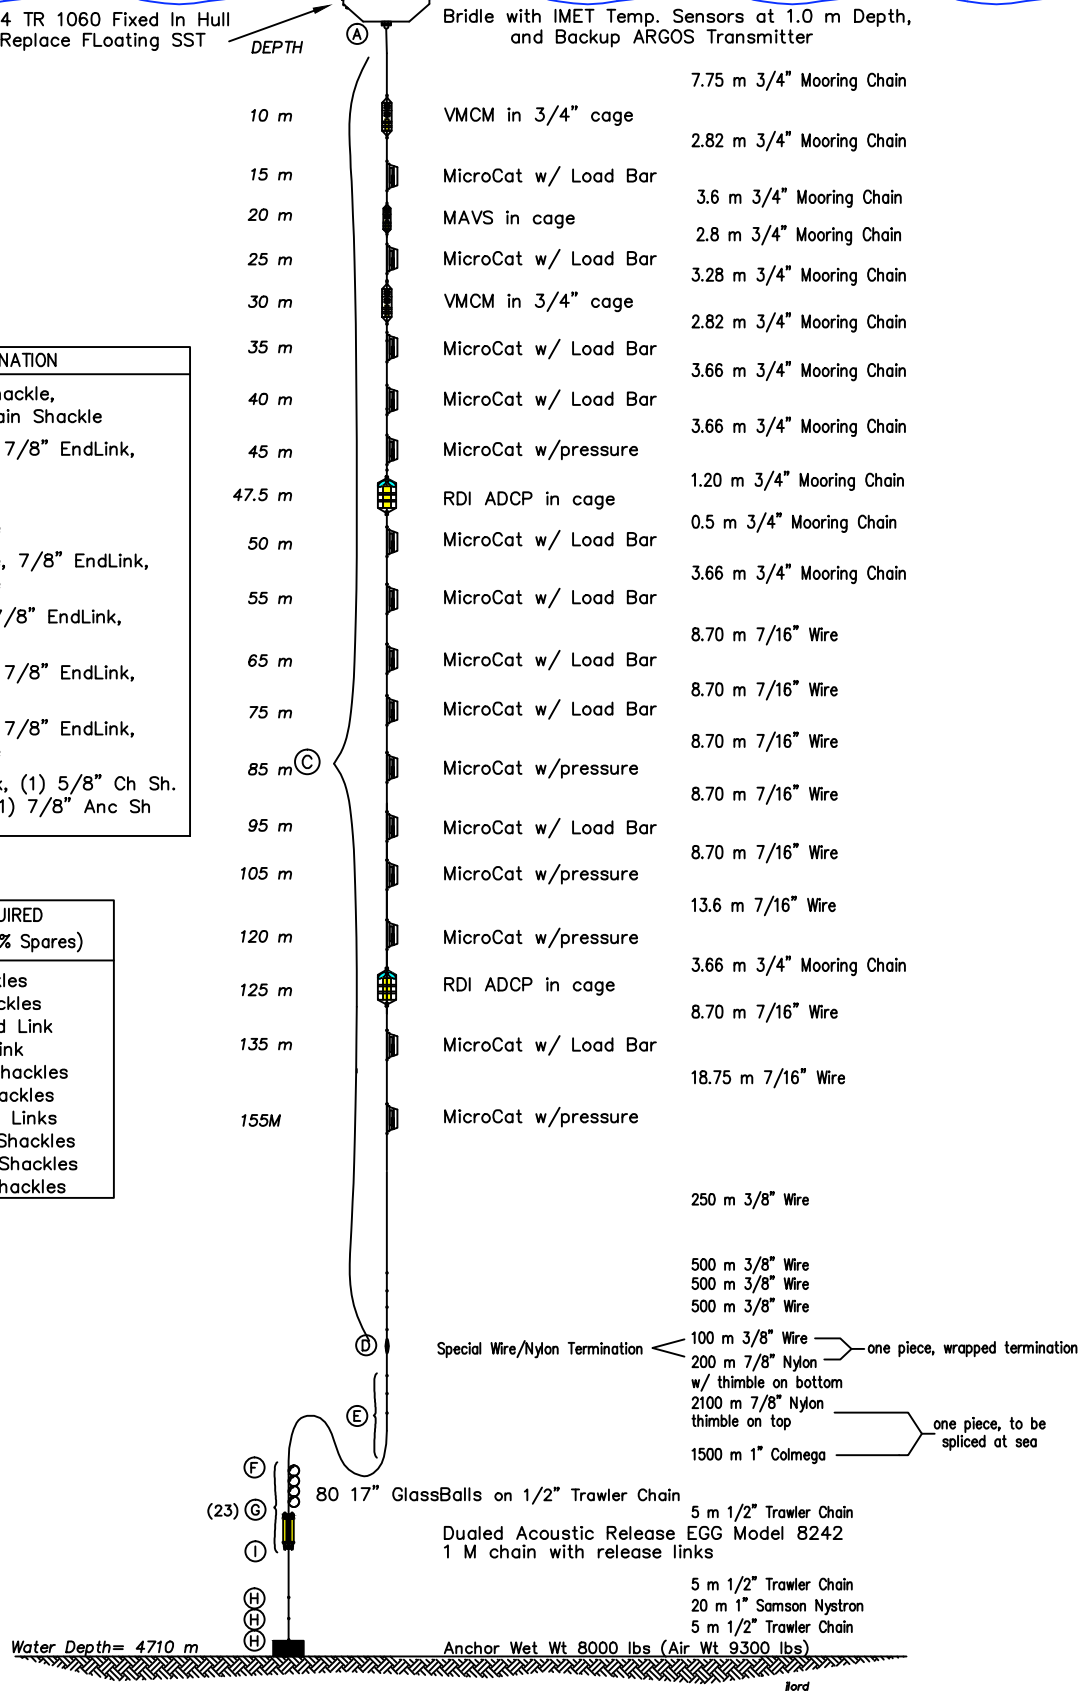

WHOTS MOORING
7th Deployment - v1