

MAX. DIA. BUOY WATCH CIRCLE = 5.6 N.Miles  
 anchor position 38 01.519 N, 64 47.576 W  
 fallback 176 meters


2.7 m Modular Buoy with the following equipment:  
 (3) IMET/ARGOS Telemetry, (1) AOPE Flux/motion pack



Note: All shackles to be shot peened and coated

Note: SBE 39s, Seacats, SBE 37s and SBE39s All mounted on mooring with sensors up

HARDWARE DESIGNATION	
(A)	U-Joint, 1" Chain Shackle, 1" EndLink, 7/8" Chain Shackle
(C)	3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle
(D)	3/4" Chain Shackle, 3/4" Anchor Shackle
(E)	3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle
(F)	1" Anchor Shackle, 7/8" EndLink, 5/8" Chain Shackle
(G)	5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle
(H)	5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle
(I)	(1) 1/4" Master Link, (1) 5/8" Ch Sh, (1) 7/8" End Link, (1) 7/8" Anc Sh

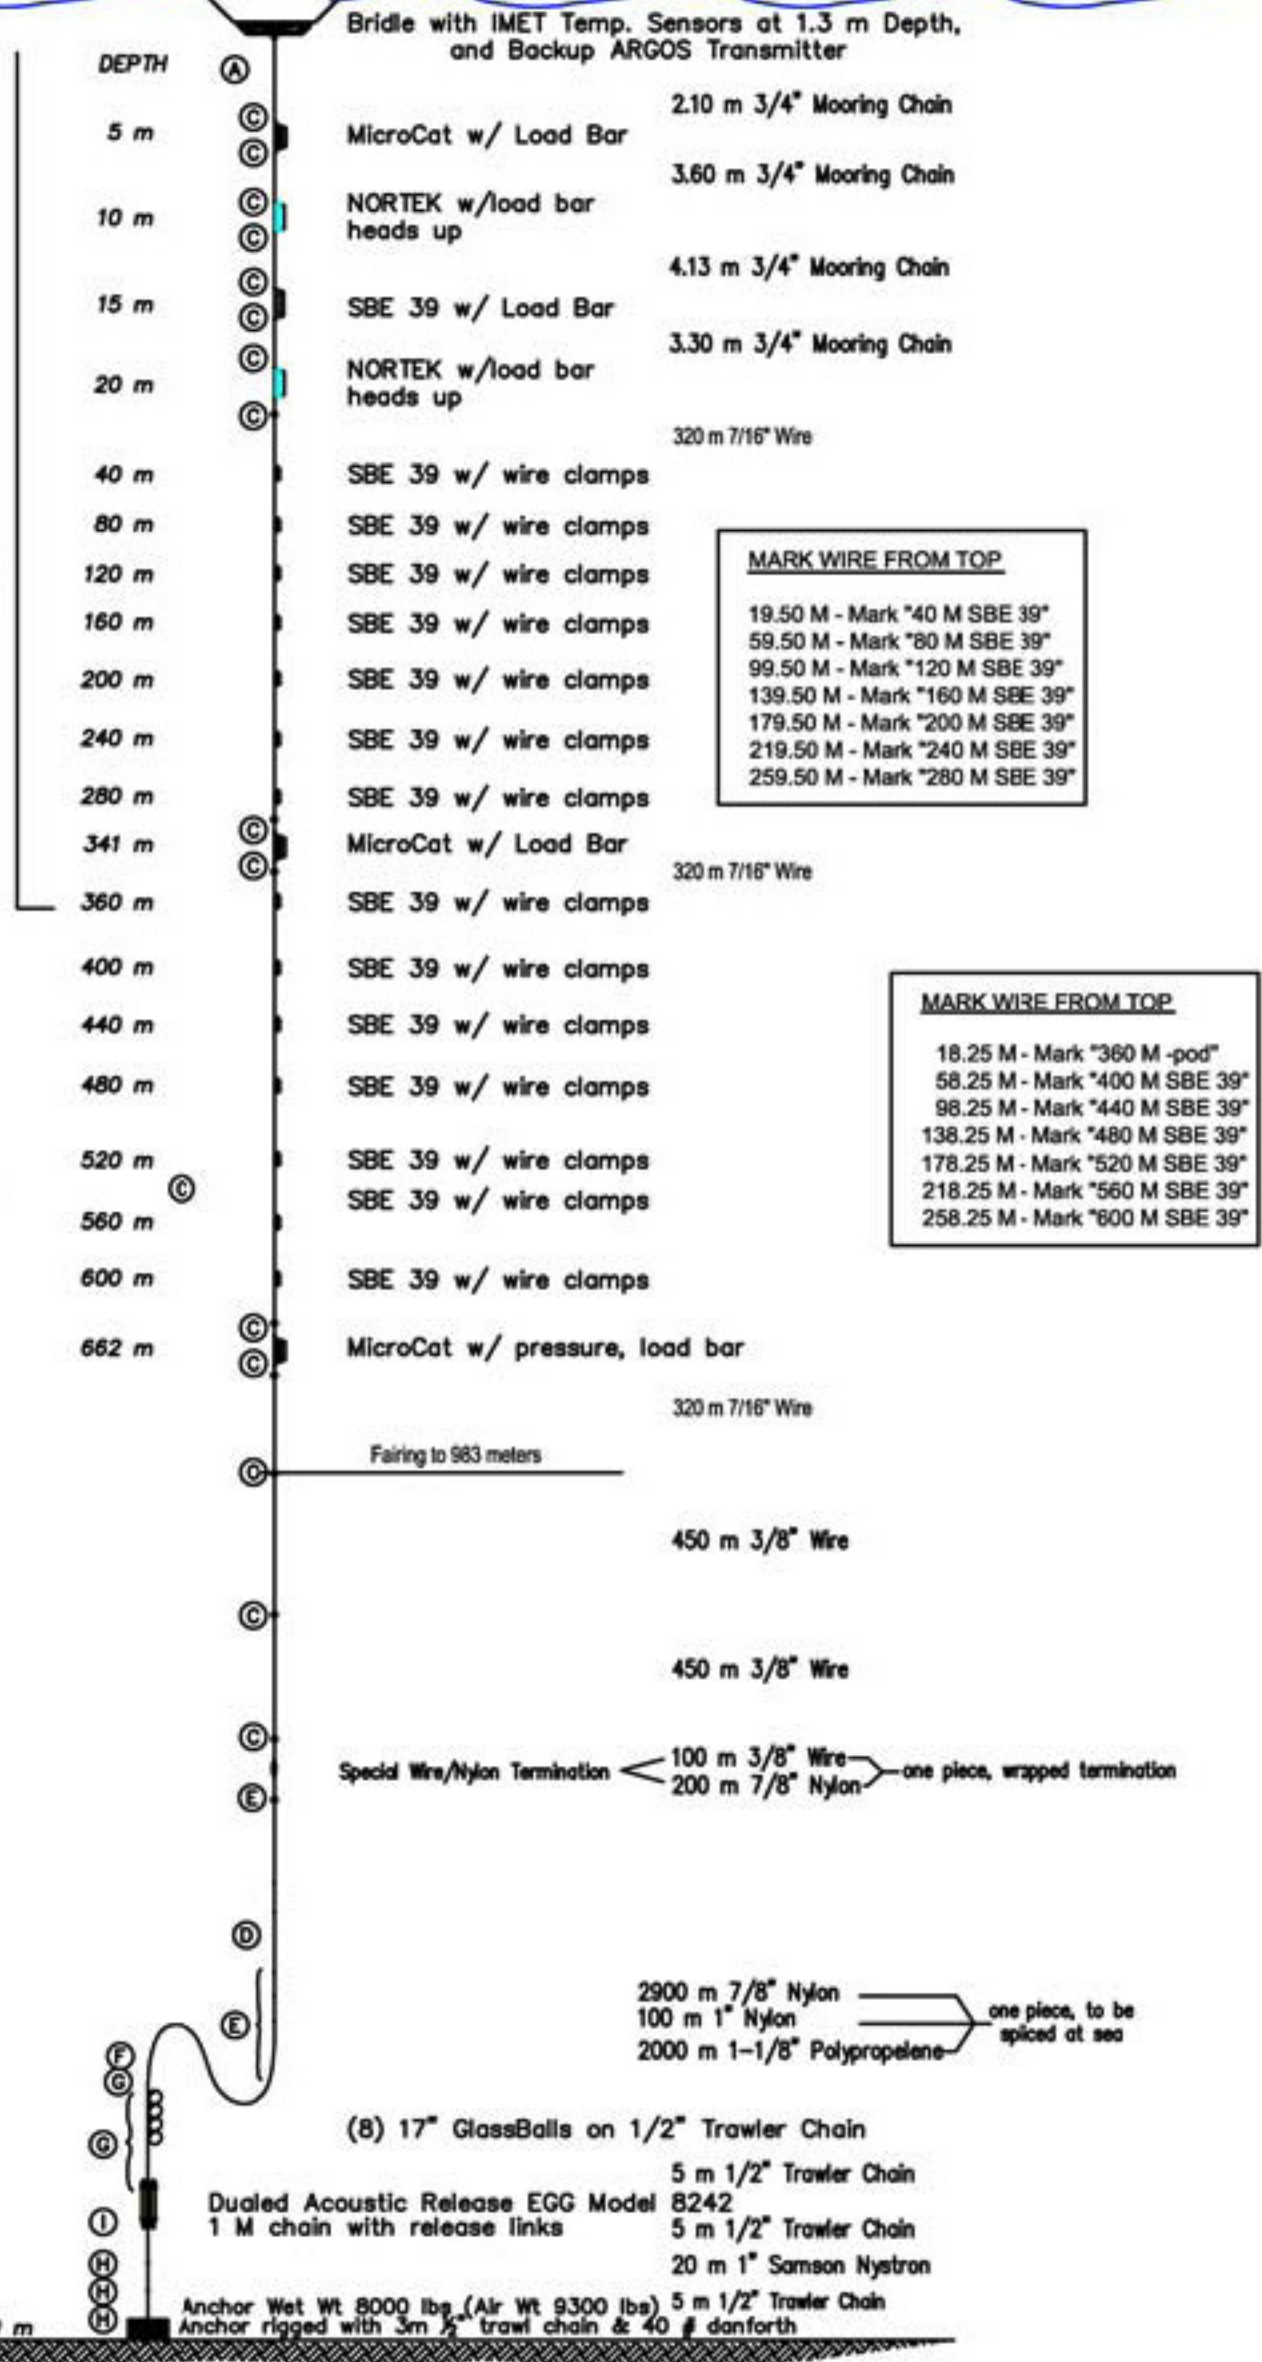

MARK WIRE FROM TOP

19.50 M - Mark "40 M SBE 39"

59.50 M - Mark "80 M SBE 39"

99.50 M - Mark "120 M SBE 39"

139.50 M - Mark "160 M SBE 39"

179.50 M - Mark "200 M SBE 39"

219.50 M - Mark "240 M SBE 39"

259.50 M - Mark "280 M SBE 39"

MARK WIRE FROM TOP

18.25 M - Mark "360 M -pod"

58.25 M - Mark "400 M SBE 39"

98.25 M - Mark "440 M SBE 39"

138.25 M - Mark "480 M SBE 39"

178.25 M - Mark "520 M SBE 39"

218.25 M - Mark "560 M SBE 39"

258.25 M - Mark "600 M SBE 39"

Scope = 1.45  
 Water Depth = 4979 m

CLIMODE 2 MOORING F

Ad Deployed 11/20/06