

NTAS 9

MAX. DIA. BUOY WATCH CIRCLE = 4.25 N.Miles

PO Mooring # 1208


Position: 14°49.5'N, 51°00.9'W

6 meter compliant section with universal and 8 conductors on coil cord for telemetry

Based on .80m water line, 5 m temp mounted 3.81 m from top of EM chain, 10 m temp 1.84m from bottom of bellmouth

| HARDWARE DESIGNATION | |
|----------------------|--|
| (A) | U-Joint, 1" Chain Shackle, 1" EndLink, 7/8" Chain Shackle |
| (C) | 3/4" Chain Shackle, 7/8" EndLink, 3/4" Chain Shackle |
| (D) | 3/4" Chain Shackle, 3/4" Anchor Shackle |
| (E) | 3/4" Anchor Shackle, 7/8" EndLink, 3/4" Anchor Shackle |
| (G) | 5/8" Chain Shackle, 7/8" EndLink, 5/8" Chain Shackle |
| (H) | 5/8" Chain Shackle, 7/8" EndLink, 7/8" Anchor Shackle |
| (I) | 1-1/4" Master Link, (1) 5/8" Ch Sh. (1) 7/8" End Link, (1) 7/8" Anc Sh |

| HARDWARE REQUIRED (Includes approx. 20% Spares) | |
|--|----------------------|
| (2) | 1.25" Master Link |
| (5) | 7/8" Anchor Shackles |
| (33) | 7/8" Weldless Links |
| (16) | 3/4" Chain Shackles |
| (5) | 3/4" Anchor Shackles |
| (45) | 5/8" Chain Shackles |

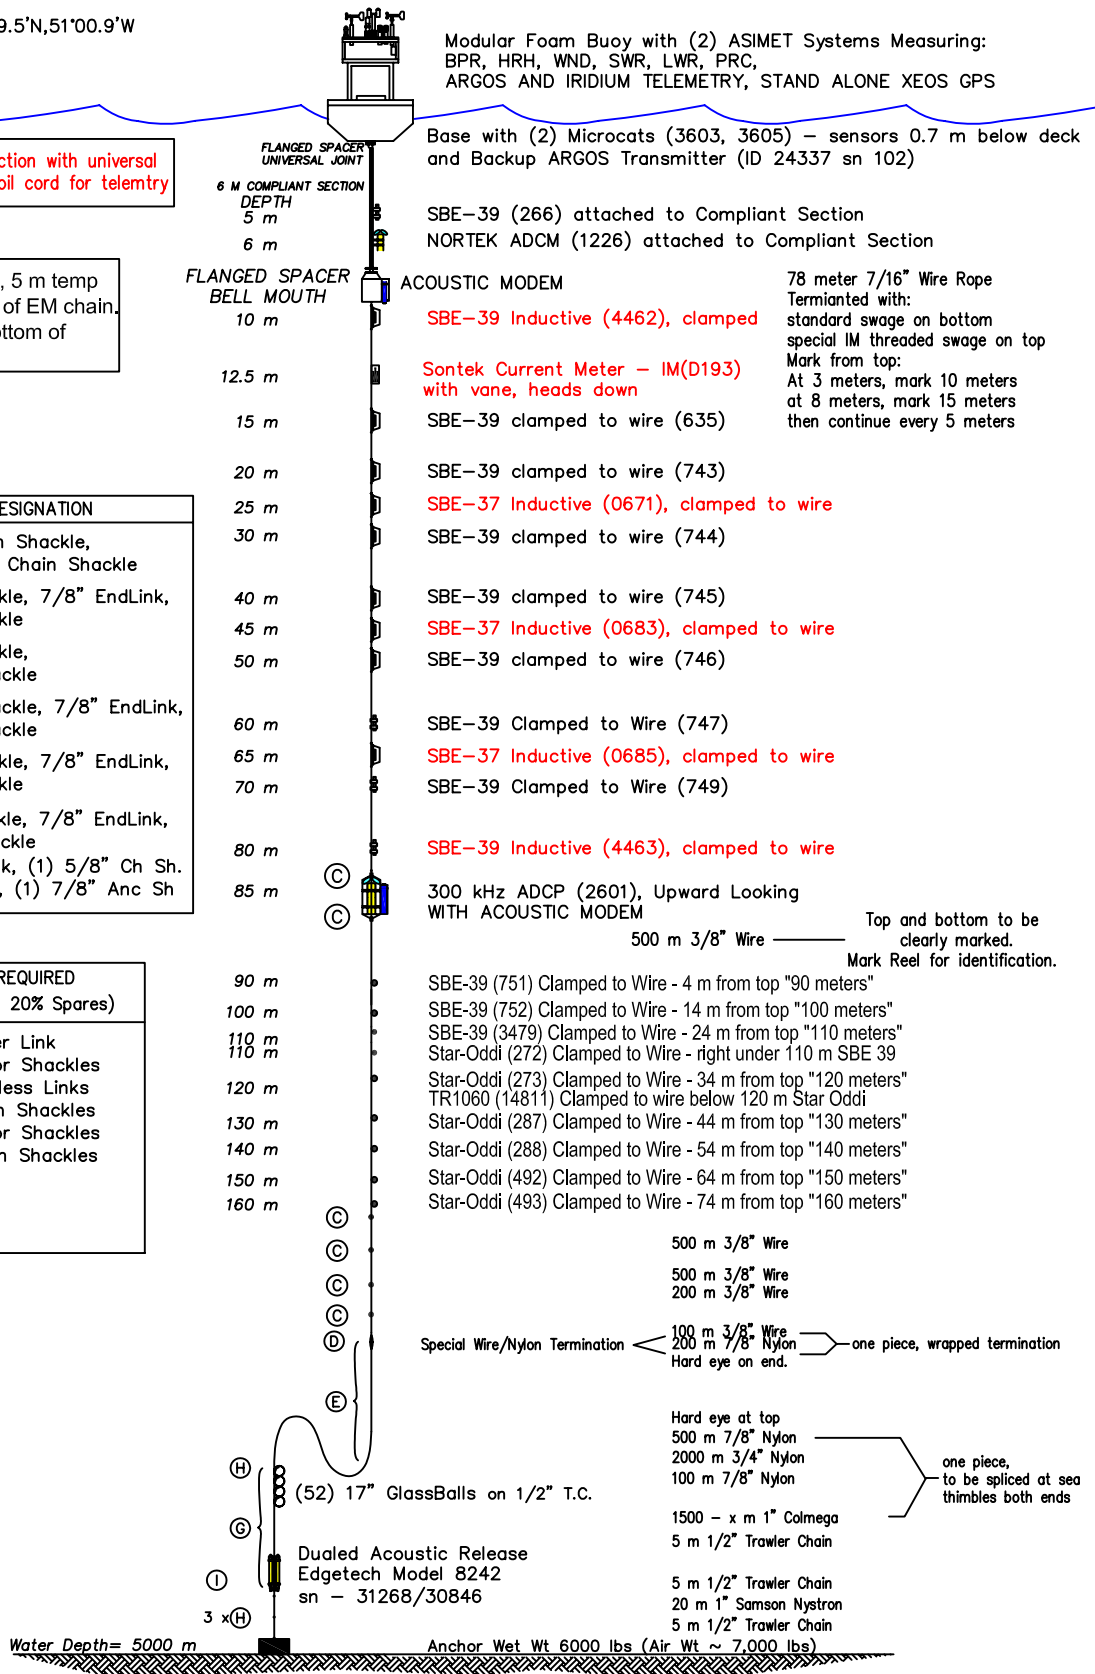

NTAS 9 MOORING AS DEPLOYED 6/29/09

Jeff Lord date: 06/30/09
NTAS9_final.dwg